



APPLICATION


Designed for for mobile deployment
Fast reaction: T90 – time of 10 sec.

- Grid surveys
- Baseline mapping
- Leak detection
- Asset integrity survey

Short mob / demob time
Qualified for submersible Alvin and AUVs

FEATURES

- Maintenance and Calibration free
- Fully operational within minutes
- Simple data structure
- Low constraint on transmission
- Integrated status management
- Optional internal data logger with over 37,000,000 datasets capacity

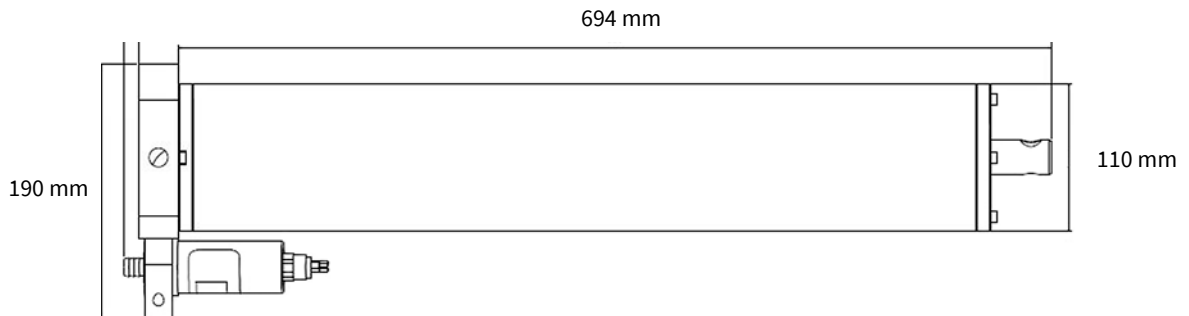

SPECIFICATIONS

- Dimensions L x D: 694 x 190 mm
 - Weight in air: 14 kg
 - Water displacement: 5.9 L
 - Weight in freshwater: 8 kg
-
- Depth rating: 4000 m
 - Operating temperature: -3 °C - + 20 °C
 - Range: 2 - 10000 ppmv
-
- Reaction time: 5 s
 - T90 time: 10 s
 - Supply Voltage: 11 – 30 VDC
 - Power consumption: 5 W
 - Output: RS232 / RS485 (user select)